



REV	DATE	DESCRIPTION	DRAWN	CHECKED
-	30/03/21	DRAWING CREATED	MF	MF



	CHROME	BRASS	MATT BLACK
PRODUCT CODE	SH-EMS-CP	SH-EMS-BB	SH-EMS-MB
CONSTRUCTION	BRASS BODY (CuZn38Pb18); ZINC ALLOY HANDLE	BRASS BODY (CuZn38Pb18); ZINC ALLOY HANDLE	BRASS BODY (CuZn38Pb18); ZINC ALLOY HANDLE
FINISH	CHROME PLATED TO BS EN 248	BRUSHED BRASS	MATT BLACK
PRODUCT TYPE	CONTEMPORARY	CONTEMPORARY	CONTEMPORARY
PLUMBING SYSTEMS	SUITABLE FOR ALL PLUMBING SYSTEMS, PREFERABLY BALANCED MIN. SUPPLY PRESSURE DIFFERENTIAL REQUIREMENT IS 5:1	SUITABLE FOR ALL PLUMBING SYSTEMS, PREFERABLY BALANCED MIN. SUPPLY PRESSURE DIFFERENTIAL REQUIREMENT IS 5:1	SUITABLE FOR ALL PLUMBING SYSTEMS, PREFERABLY BALANCED MIN. SUPPLY PRESSURE DIFFERENTIAL REQUIREMENT IS 5:1
WATER PRESSURE	MIN. 0.5 BAR, MAX. 6.0 BAR	MIN. 0.5 BAR, MAX. 6.0 BAR	MIN. 0.5 BAR, MAX. 6.0 BAR
STANDARDS	COMPLIES WITH BSEN 1111	COMPLIES WITH BSEN 1111	COMPLIES WITH BSEN 1111
CERTIFICATION	MANUFACTURED TO COMPLY WITH WRAS & TMV2	MANUFACTURED TO COMPLY WITH WRAS & TMV2	MANUFACTURED TO COMPLY WITH WRAS & TMV2
CARTRIDGE	THERMOSTATIC	THERMOSTATIC	THERMOSTATIC
VALVE	INTEGRATE DIVERTER CERAMIC VALVE	INTEGRATE DIVERTER CERAMIC VALVE	INTEGRATE DIVERTER CERAMIC VALVE
CHECK VALVE	0.5-10gpm	0.5-10gpm	0.5-10gpm
FITTING	EASY FIT	EASY FIT	EASY FIT
ADD. INFO	1) TEMPERATURE PRE SET 38 DEG. C, WITH PUSH BUTTON OVERRIDE TO 48 DEG. C 2) AUTOMATIC SHUT OFF IN THE EVENT OF HOT OR COLD WQTER SUPPLY FAILURE 3) COOL TOUCH TECHNOLOGY 4) STAINLESS STEEL ADJUSTABLE RISER RAIL 5) 250mm, SS304, AERATOR-INDUCTION THIN SHOWER HEAD 6) HANDSET: SELECT 3 MODES, CHROME, ABS 7) HANDSET HOLDER: BRASS 8) HOSE: CHROME, SMOOTH PVC, 1.5mm	1) TEMPERATURE PRE SET 38 DEG. C, WITH PUSH BUTTON OVERRIDE TO 48 DEG. C 2) AUTOMATIC SHUT OFF IN THE EVENT OF HOT OR COLD WQTER SUPPLY FAILURE 3) COOL TOUCH TECHNOLOGY 4) STAINLESS STEEL ADJUSTABLE RISER RAIL 5) 250mm, SS304, AERATOR-INDUCTION THIN SHOWER HEAD 6) HANDSET: SELECT 3 MODES, CHROME, ABS 7) HANDSET HOLDER: BRASS 8) HOSE: CHROME, SMOOTH PVC, 1.5mm	1) TEMPERATURE PRE SET 38 DEG. C, WITH PUSH BUTTON OVERRIDE TO 48 DEG. C 2) AUTOMATIC SHUT OFF IN THE EVENT OF HOT OR COLD WQTER SUPPLY FAILURE 3) COOL TOUCH TECHNOLOGY 4) STAINLESS STEEL ADJUSTABLE RISER RAIL 5) 250mm, SS304, AERATOR-INDUCTION THIN SHOWER HEAD 6) HANDSET: SELECT 3 MODES, CHROME, ABS 7) HANDSET HOLDER: BRASS 8) HOSE: CHROME, SMOOTH PVC, 1.5mm

FLOW RATES (Litres per minute)										
SYSTEM PRESSURE	0.1 BAR	0.2 BAR	0.3 BAR	0.5 BAR	1.0 BAR	1.5 BAR	2.0 BAR	3 BAR	4.0 BAR	5.0 BAR
	-	3.3	-	6.5	10.3	-	-	18.9	-	-

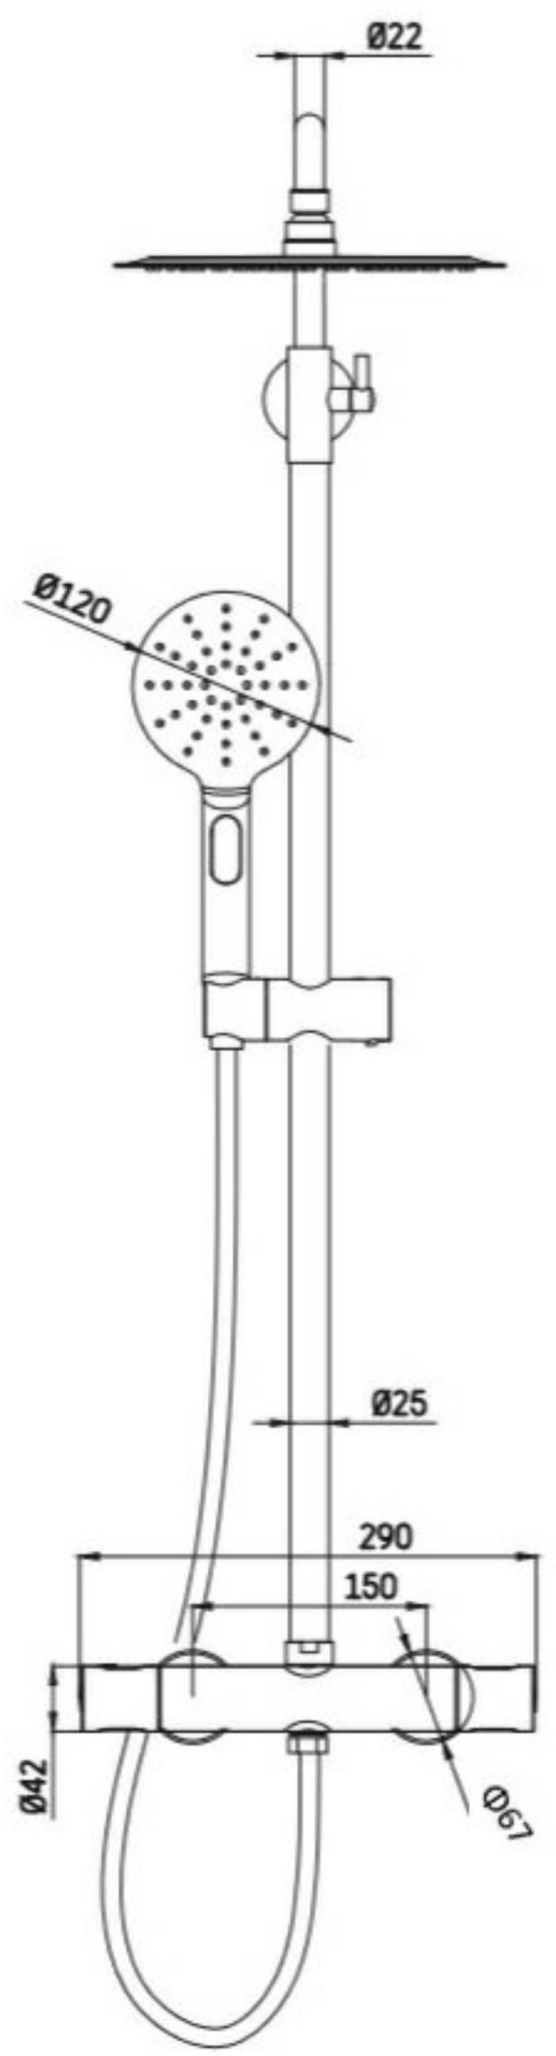

— THE —
LUXURY BATH
— COMPANY —

CREATED	DRAWN BY	CHECKED BY		
30/03/21	MF	MF		
DRAWING TITLE				
THERMOSTATIC 2 WAY SHOWER MIXER				
DRAWING NO.	CURRENT REV.	SHEET	SHEET SIZE	SCALE
SH-EMS	-	1/1	A3	1:5